

**Radhai Mahavidyalaya Aurangabad College of Computer  
science**

**& management science**

Approved by Govt. of Maharashtra & Affilate to Dr. Babasaheb Ambedkar university Aurangabad.

Recognized Under Section 2(f) & 12 (B) of the U.G.C Act.

An ISO 9001-2015 Certified institution

**MICROPROCESSOR LAB  
MANUAL**

**Radhai**  
Student Name:.....

RollNo :.....

Branch:.....Section.....

Year .....Semester.....


**FACULTY INCHARGE**

# CONTENTS

1.	Syllabus for Lab.....	3
2.	Study and Evaluation Scheme.....	4
3.	Index.....	5
4.	Experiment No. 1.....	6
5.	Experiment No. 2.....	12
6.	Experiment No. 3.....	15
7.	Experiment No. 4.....	20
8.	Experiment No. 5.....	23
9.	Experiment No. 6.....	26
10.	Experiment No. 7.....	28
11.	Experiment No. 8.....	29

## **SYLLABUS FOR MICROPROCESSOR LAB**

1. Write a program using 8085 Microprocessor for Decimal, Hexadecimal addition and subtraction of two Numbers.
2. Write a program using 8085 Microprocessor for addition and subtraction of two BCD numbers.
3. To perform multiplication and division of two 8 bit numbers using 8085.
4. To find the largest and smallest number in an array of data using 8085 instruction set.
5. To write a program to arrange an array of data in ascending and descending order.
6. To convert given Hexadecimal number into its equivalent ASCII number and vice versa using 8085 instruction set.
7. To write a program to initiate 8251 and to check the transmission and reception of character.
8. To interface 8253 programmable interval timer to 8085 and verify the operation of 8253 in six different modes.
9. To interface DAC with 8085 to demonstrate the generation of square, saw tooth and triangular wave.
10. Serial communication between two 8085 through RS-232 C port.

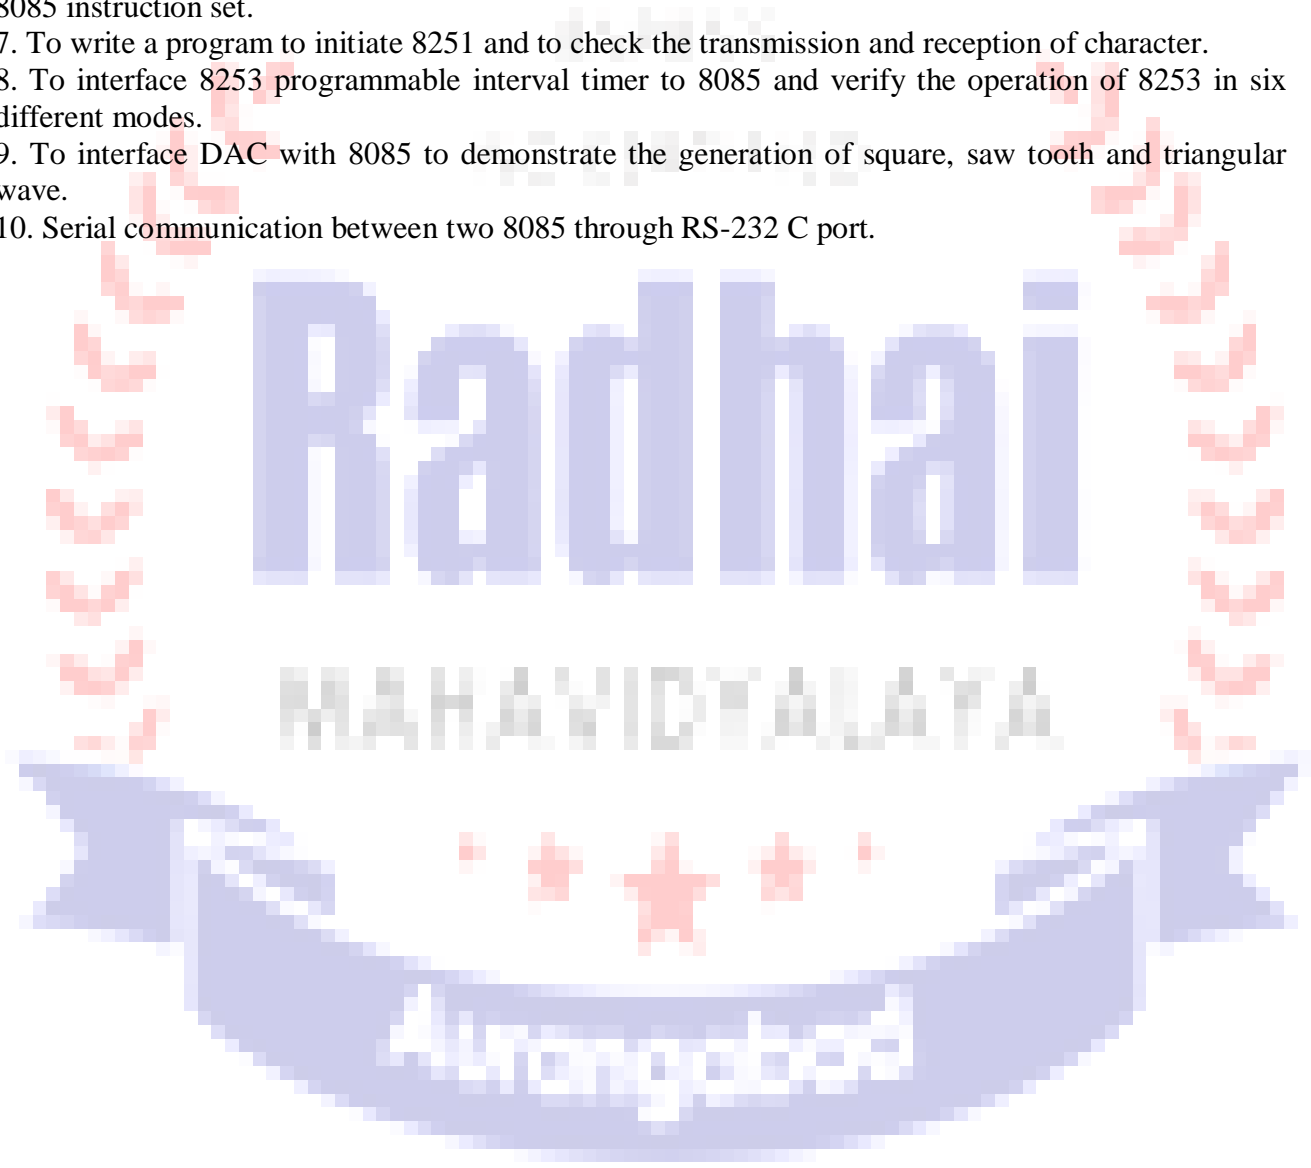

## **STUDY AND EVALUATION SCHEME**

### **SESSIONAL EVALUATION:-**

**CLASS TEST : 10 MARKS**

**TEACHER'S ASSESMENT : 10 MARKS**

**EXTERNAL EXAM : 30 MARKS**

**TOTAL : 50 MARKS**

---



# INDEX

S.NO.	NAME OF EXPERIMENT	DATE OF EVALUATION	GRADE

## EXPERIMENT NO. – 1(a)

### OBJECTIVE:

Write a program to add two hexadecimal & decimal numbers.

### APPARATUS REQUIRED: -

Sr. no.	Name of equipments/components/software	Specification/range/rating/versi on	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	

### DESCRIPTION/ALGORITHM:-


**Hexadecimal Addition:** The program takes the content of 2009, adds it to 200B & stores the result back at 200C.

- Steps:**
1. Initialize HL Reg. pair with address where the first number is lying.
  2. Store the number in accumulator.
  3. Get the second number.
  4. Add the two numbers and store the result in 200B.
  5. Go back to Monitor

Let: (2009 H) = 80 H  
(200B H) = 15 H  
Result = 80 H + 15 H = 95 H

(2009 H)	→	A
A	→	B
(200B H)	→	A
A + B	→	A
A	→	(200C H)

### FLOWCHART :-

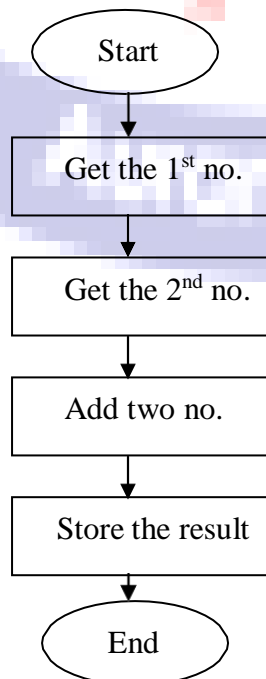


## PROGRAM:-

```
LXI H, 2009 ; Point 1st no.  
MOV A, M ; Load the acc.  
INX H ; Adv Pointer  
ADD M ; ADD 2nd NO.  
INX H ; Adv Pointer  
MOV M, A ; Store Result  
RST 5
```

## Decimal Addition:

- Steps:**
1. Initialize HL Reg. pair with address where the first number is lying.
  2. Store the number in accumulator.
  3. Get the second number.
  4. Add the two numbers and store the result in 200B.
  5. Go back to Monitor

## FLOWCHART:-

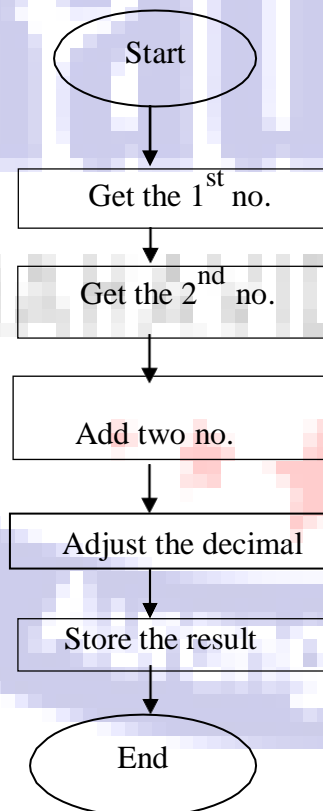

### **PROGRAM:-**

LXI H, 2009	;	Point 1 <sup>st</sup> no.
MOV A, M	;	Load the acc.
INX H	;	Adv Pointer
ADD M	;	ADD 2 <sup>nd</sup> NO.
DAA	;	Adjust the decimal
INX H	;	Adv Pointer
MOV M, A	;	Store Result
RST 5		

### **RESULTS:-**

Thus the numbers at 2009H and at memory are added.

### **CONCLUSION:-**

Thus the program to add two 8-bit numbers was executed.

### **PRECAUTION:-**



## EXPERIMENT NO. – 1 (b)

**OBJECTIVE:-** Write a program to subtract two hexadecimal & decimal numbers

**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	


**DESCRIPTION/ALGORITHM:-**

**Hexadecimal Subtraction :** The program takes the content of 2009, subtracts it to 200B & stores the result back at 200C.

**Steps:-**

1. Initialize HL Reg. pair with address where the first number is lying.
2. Store the number in accumulator.
3. Get the second number.
4. Subtract second no from acc and store the result in 200B.
5. Go back to Monitor

**FLOWCHART:-**

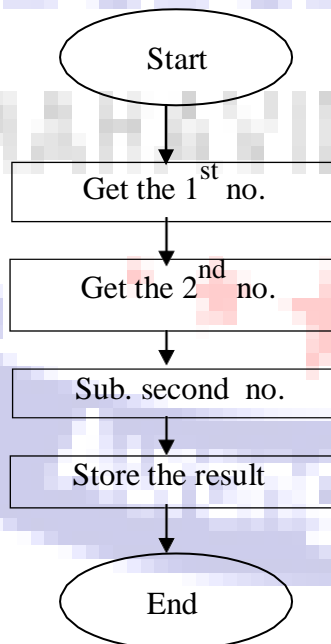

**PROGRAM:-**


```
LXI H, 2009 ; Point 1st no.
MOV A, M ; Load the acc.
INX H ; Adv Pointer
SUB M ; Subtract IIND NO.
INX H ; Adv Pointer
MOV M, A ; Store Result
RST 5
```

## Decimal Subtraction :

### Steps:-

1. Initialize HL Reg. pair with address where the first number is lying.
2. Store the number in accumulator.
3. Get the second number.
4. Subtract second no from acc and store the result in 200B.
5. Adjust the decimal
6. Go back to Monitor

### FLOWCHART:-

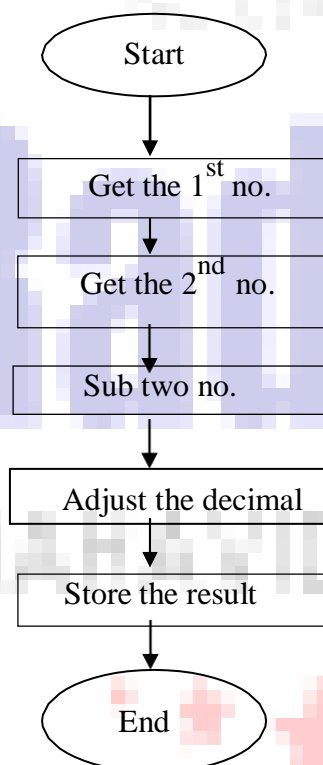

### PROGRAM:-

```
LXI H, 2009 ; Point 1st no.  
MOV A, M ; Load the acc.  
INX H ; Adv Pointer  
SUB M ; Subtract IIND NO.  
DAA ; Adjust the decimal  
INX H ; Adv Pointer  
MOV M, A ; Store Result  
RST 5
```

### RESULTS:-

Numbers at 2009H and in HL pairs (Memory) are subtracted

### CONCLUSION:-

Thus the subtraction operation is taken out using assembly language.

## **PRECAUTION:-**

## **PRE EXPERIMENT QUESTION BANK:-**

Study how to operate the microprocessor in single stepping. It is very useful in debugging. Identify the clock crystal and record its frequency. Calculate the time for opcode fetch. Identify 8255 programmable peripheral enter face. Find out the address of parts from manual. Identify the ROM & RAM and show in the memory map.

## **POST EXPERIMENT QUESTION BANK:-**

Write a small program to enter a data to accumulator and move it to all registers. Find out how to read the contents of registers and flags. Read the content of PC, SP. Why DAA instruction is to be written just after ADD instruction. In above program why MOV A,M instruction is used if direct instruction LDA, address is available.

## EXPERIMENT NO. -0 2

**OBJECTIVE:-** Write a program using 8085 Microprocessor for addition and subtraction of two BCD numbers.


**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/components/software	Specification/range/rating/versi on	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIEN TECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

- Steps:**
1. Initialize HL Reg. pair with address where the first number is lying.
  2. Store the number in accumulator.
  3. Get the second number.
  4. Add the two numbers and store the result in 200B.
  5. Go back to Monitor


**FLOWCHART:-**

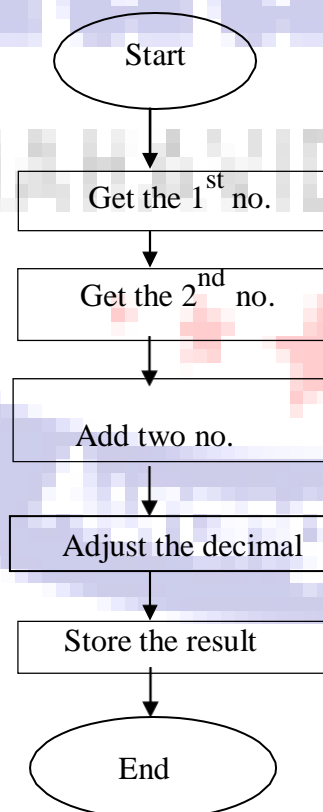

### Steps:-

7. Initialize HL Reg. pair with address where the first number is lying.
8. Store the number in accumulator.
9. Get the second number.
10. Subtract second no from acc and store the result in 200B.
11. Adjust the decimal
12. Go back to Monitor

### FLOWCHART:-

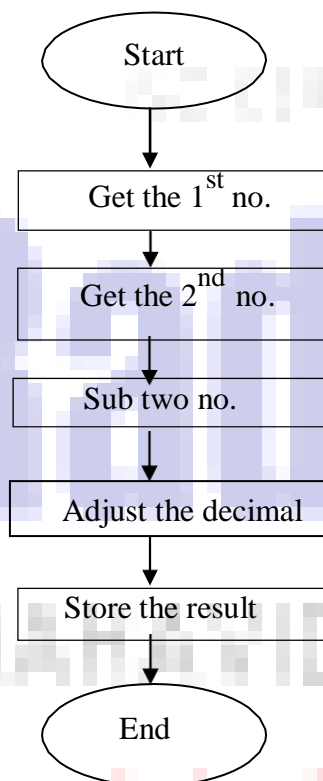

### PROGRAM:-

```
LXI H, 2009 ; Point 1st no.
MOV A, M ; Load the acc.
INX H ; Adv Pointer
SUB M ; Subtract IIND NO.
DAA ; Adjust the decimal
INX H ; Adv Pointer
MOV M, A ; Store Result
RST 5
```

### RESULTS:-

The BCD numbers at 2009H and memory are added or subtracted.

### CONCLUSION:-

Thus the subtraction operation is taken out using assembly language.

### **PRE EXPERIMENT QUESTION BANK:-**

1. Explain the following instructions with addressing modes & no of byte.
  - (a). LHL 8050
  - (b). XTHL
  - (c). DADH.
2. What is the necessity to have two status lines  $S_1$  &  $S_0$  in 8085 ?

### **POST EXPERIMENT QUESTION BANK:-**

3. Write a program to exchange the contents of memory location 1000H and 2000H.
4. Why  $AD_0 - AD_7$  lines are multiplexed ?
5. Give the difference between machine language, assembly language and high level language.



### EXPRIMENT NO. – 3(a)

**OBJECTIVE: -** Write a program to perform multiplication of two 8 bit numbers using bit addition method


**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/ components/ software	Specification/range/rating/ version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIEN TECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

- 1) Start the program by loading HL register pair with address of memory location.
- 2) Move the data to a register (B register).
- 3) Get the second data and load into Accumulator.
- 4) Add the two register contents.
- 5) Check for carry.
- 6) Increment the value of carry.
- 7) Check whether repeated addition is over and store the value of product and carry in memory location.

**FLOWCHART:**

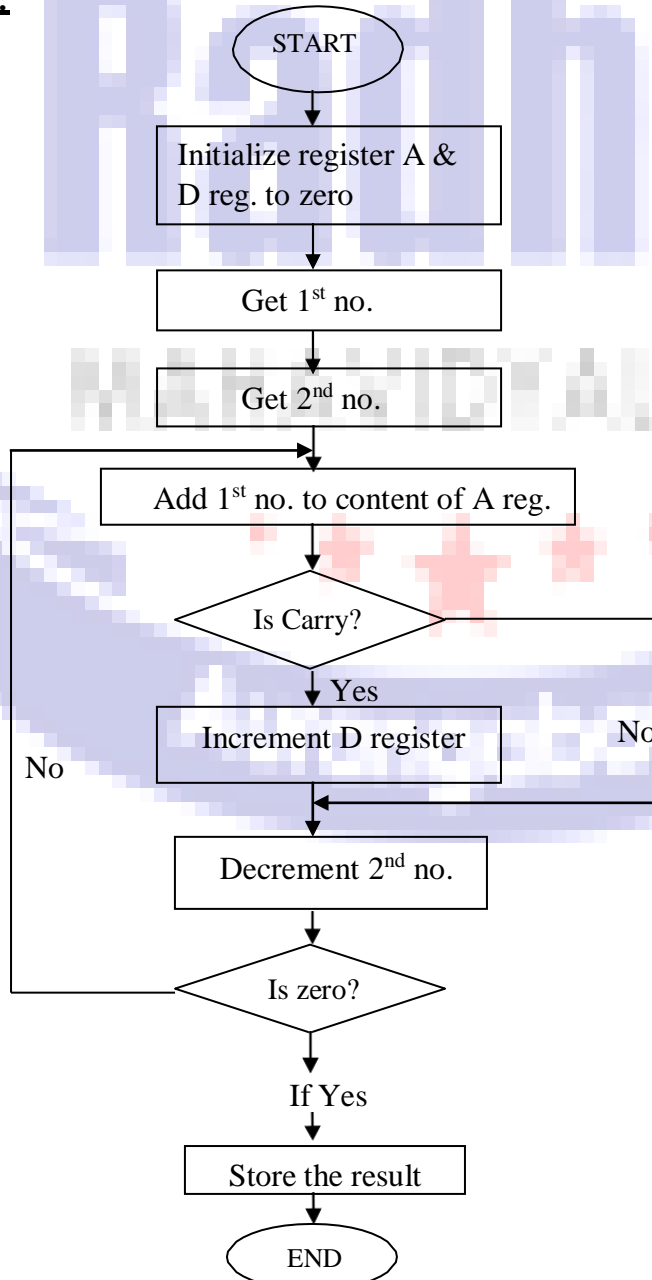

## **PROGRAM:**

```
MVI D, 00      ; Initialize register D to 00
MVI A, 00      ; Initialize Accumulator content to 00
LXI H, 4150    ; HL Points 4150
MOV B, M       ; Get the first number in B - register
INX H          ; HL Points 4151
MOV C, M       ; Get the second number in C- reg.
LOOP : ADD B   ; Add content of A - reg to register B.
JNC NEXT       ; Jump on no carry to NEXT.
INR D          ; Increment content of register D
NEXT : DCR C   ; Decrement content of register C.
JNZ LOOP       ; Jump on no zero to address
STA 4152       ; Store the result in Memory
MOV A, D       ; Get the carry in Accumulator
STA 4153       ; Store the MSB of result in Memory
HLT           ; Terminate the program.
```

## **RESULTS:-**

```
Input: FF (4150)
      FF (4151)
Output: 01 (4152)
       FE (4153)
```

## **CONCLUSION:-**

Thus the multiplication process is taken out using assembly language for 8085 microprocessor



### EXPERIMENT NO. – 3 (b)

**OBJECTIVE:** - Write a program to perform multiplication of two 8 bit numbers using bit rotation method

**APPARATUS REQUIRED:** -

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIEN TECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

- 1) Start the program by loading HL register pair with address of memory location.
- 2) Move the data to a register (E register).
- 3) Get the second data and load into Accumulator.
- 4) Add the two register contents.
- 5) Check for carry.
- 6) Increment the value of carry.
- 7) Check whether repeated addition is over and store the value of product and carry in memory location.
- 8) Terminate the program.

**EXAMPLE :**

Steps	Product	Multiplier	Comments
	B <sub>7</sub> B <sub>6</sub> B <sub>5</sub> B <sub>4</sub> B <sub>3</sub> B <sub>2</sub> B <sub>1</sub> B <sub>0</sub>	CY B <sub>3</sub> B <sub>2</sub> B <sub>1</sub> B <sub>0</sub>	
	0 0 0 0 0 0 0 0	0 0 1 0 1	Initial Stage
Step 1	0 0 0 0 0 0 0 0	0 1 0 1 0	Shift left by 1
Step 2	0 0 0 0 0 0 0 0	0 1 0 1 0	Don't add since CY= 0
	0 0 0 0 0 0 0 0	1 0 1 0 0	Shift
Step 3	0 0 0 0 1 1 0 0	1 0 1 0 0	Add multiplicand;CY=1
	0 0 0 1 1 0 0 0	0 1 0 0 0	Shift left by 1
Step 4	0 0 0 1 1 0 0 0	0 1 0 0 0	Don't add since CY= 0
	0 0 1 1 0 0 0 0	1 0 0 0 0	Add multiplicand;CY=1

**PROGRAM:**

```
LXI H, 2200 H ; Initialize the memory pointer
MOV E , M ; Get multiplicand
MVI D, 00 H ; Extend to 16 bits
INX H ; Increment memory pointer
MOV A , M ; Get Multiplier
LXI H , 0000 H ; Product = 0
MVI B, 08 H ; Initialize counter with count 8
LOOP: DAD H ; Product = product X 2
```

RAL		
JNC XYZ	;	Is carry from multiplier 1?
DAD D	;	Yes, product = product + multiplicand
XYZ: DCR B	;	Is counter = 0
JNZ LOOP	;	No, repeat
SHLD 2300 H	;	Store the result
HLT		

**RESULTS:-**

Multiplication has been carried out between the data of 2200H and 2201 H.

**CONCLUSION:-**

Thus the multiplication process for 8 bit binary numbers is taken out in 8085 microprocessor

**PRE EXPERIMENT QUESTION BANK:-**

1. Define the following terms.  
(a) operand (b) opcode
2. What is meant by addressing modes
3. Give the addressing modes of the following instructions.  
(a) ADI B7H  
(b) SUB B  
(c) DCX D  
(d) RRC

The contents of register (B) and accumulator (A) of 8085 microprocessor are 49H & 39H respectively. What are the contents of A and the status of carry flag (CY) and sign flag (S) after executing SUB B instructions.

Calculate the time required to execute the following two instructions if the system clock frequency is 750KHZ.

MOV C, E      4T states

JMP, 2050H    10T states.

## EXPRIMENT NO. – 4 (a)

**OBJECTIVE:** - Write a program to perform division of two 8 bit numbers using Repeated Subtraction method.

**APPARATUS REQUIRED:** -

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

- 1) Start the program by loading HL register pair with address of memory location.
- 2) Move the data to a register (B register).
- 3) Get the second data and load into Accumulator.
- 4) Compare the two numbers to check for carry.
- 5) Subtract the two numbers.
- 6) Increment the value of carry.
- 7) Check whether repeated subtraction is over and store the value of product and Carry in memory location.
- 8) Terminate the program.

**PROGRAM:**

```
LXI H, 4150
MOV B , M      ; Get the dividend in B – reg.
MVI C, 00     ; Clear C – reg for qoutient
INX H        ;
MOV A , M     ; Get the divisor in A – reg.
NEXT: CMP B   ; Compare A - reg with register B.
JC LOOP      ; Jump on carry to LOOP
SUB B       ; Subtract A – reg from B- reg.
INR C      ; Increment content of register C.
JMP NEXT   ; Jump to NEXT
LOOP: STA 4152 ; Store the remainder in Memory
MOV A, C    ;
STA 4153   ; Store the quotient in memory
HLT        ; Terminate the program.
```

**RESULTS:**

Input: FF (4150)  
FF (4251)  
Output: 01 (4152)---- Remainder  
FE (4153) ---- Quotient

## EXPERIMENT NO.- 4 (b)

**OBJECTIVE:-** Write a program to perform division of two 8 bit numbers using bit rotation method.

**APPARATUS REQUIRED:-**

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	

**PROGRAM:**

```
MVI E, 00 H      ; Quotient = 0
LHLD 2200 H     ; Get Dividend
LDA 2300 H      ; Get Divisor
MOV B, A        ; Store Divisor
MVI C, 08 H     ; Count = 08
NEXT: DAD H      ; Dividend = Dividend X 2
MOV A, E
RLC
MOV E, A        ; Quotient = X 2
MOV A, H
SUB B           ; Is MSB of dividend > divisor
JC SKIP        ; No go to next step
MOV H, A        ; Yes subtract divisor
INR E          ; Quotient = Quotient + 1
SKIP: DCR C     ; Count = count - 1
JNZ NEXT       ; Is count = 0 repeat
MOV A, E
STA 2401 H     ; Store Quotient
MOV A, H
STA 2401 H     ; Store Remainder
HLT           ; End of program
```

**RESULTS:-**

Number at 220H is divided from the number at 2300H

**CONCLUSION:-**

Thus the division process is taken out in 8085 microprocessor

## PRE EXPERIMENT QUESTION BANK:-

1. If A=47 H, B=98H and the instruction ADD B is executed give the status of flag register after execution.
2. List out the instructions that clean the accumulator.
3. Explain any two stack related instructions.
4. Compare the action of microprocessor for the following pair of instructions.  
(a) NOP & HLT      (b) RLC & RAL



## EXPERIMENT NO.- 5

**OBJECTIVE:-** Finding the largest and smallest number from an array.


**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

Write a program to find the largest number in a given array of 16 elements. The array is stored in memory from 9200H onwards. Store the result at the end of the array.

**FLOWCHART:-**

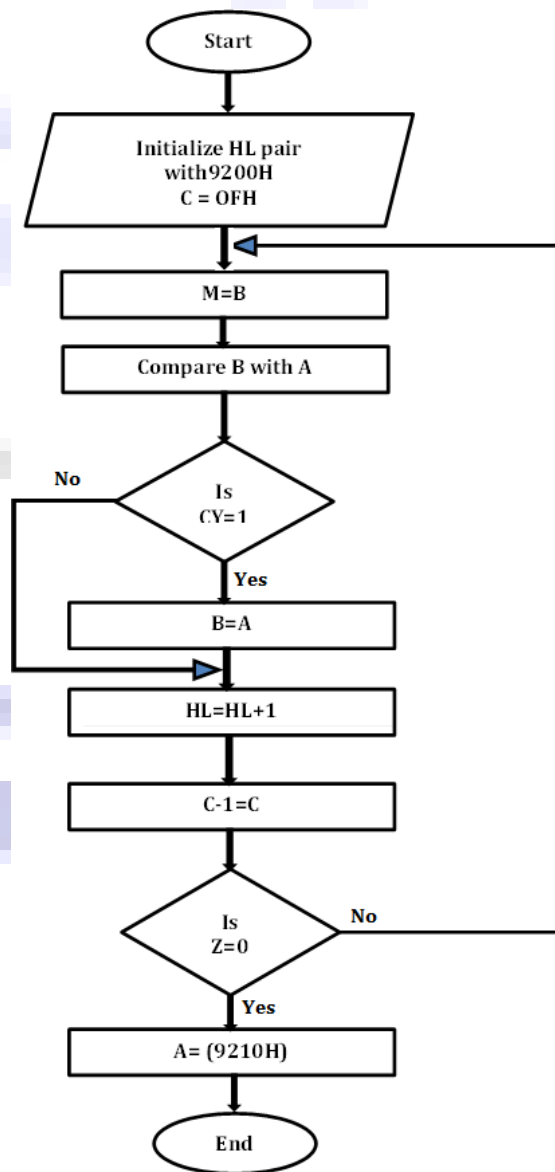

## **PROCEDURE:-**

To find largest of given no. of a given string we compare all given no. one by one. Suppose given no. is 2, 4, 3, 1, 0 1<sup>st</sup> we compare 2 & 4 (2 is in register A & 4 is in Register B).  
A < B so put B into (A) & Compare with next number i.e. 3 Here A > B so directly compare 4 with 1 then 0.

## **RESULT AND INFERENCE:-**

The largest number from the array of 16 numbers from memory location 9200H is found out and stored at 9210H

**PRECAUTION:-** Take memory locations according model of kit.

## **QUESTIONS:-**

1. The following instructions have be executed by an 8085 microprocessor.

ADDRESS (HEX)	Instruction
6010H	LXI H, 8A79H
6013H	MOVA, L
6015H	ADDH

2. Suppose HL=ABCD, stack pointer = 1234, what happens after SPHL is executed.
3. Explain any instructions in which 8085 uses the registers W & Z.
4. Write a segment of program to exchange of BC register pair with DE register pair without using MOV instructions.
5. Write two instructions which can be used to initialize stack pointer at FFFFH.

## **EXPERIMENT NO.- 6**


**AIM:-** Finding the smallest number from an array.

Write a program to find smallest number from an array of 16 elements the array is stored in memory from 9200H onwards. Store the result at memory location 9210H.

**REQUIREMENT:-** 8085 microprocessor programming kit, instruction coding sheet.

**THEORY:-** Same as largest no. we compare two number one by one but comparison process is reverse.

**PROCEDURE:-**

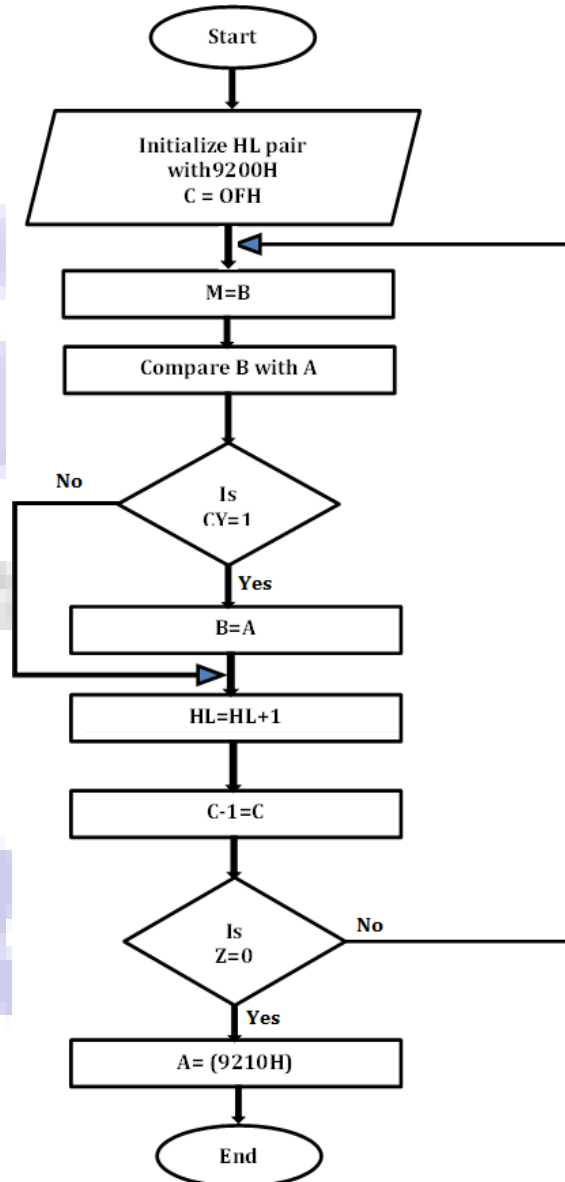

**RESULTS:**

Smallest number has been found out from a 16 bit array starting from 9200H and is stored at 9210H.

**CONCLUSION:**

Thus the smallest number has been found out from the array in assembly language for 8085 microprocessor



## EXPERIMENT NO.-7

**OBJECTIVE:-** Interfacing a program to initiate 8251 and to check transmission and reception of character

**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	

**DESCRIPTION/ALGORITHM:-**

**Steps:**

1. Initialize timer IC
2. Move the mode command word to A
3. Output it to port address C2
4. Move the command instruction word to A reg.
5. Output it to port address C2
6. Move the data to be transferred to A
7. Output it to port address C0
8. Reset the system
9. Get data from input port C0
10. Store the value in memory
11. Reset the system

**PROGRAM:**

```
MVI A,36H
Out CEH
MVI A,0AH
Out C8H
LXI H,4200H
MVI A,4EH
Out C2H
MVI A, 37H
Out C2H
MVI A, 42H
Out C0H
RST 1
ORG 4200H
In C0H
STA 4500H
RST 1
```

**RESULT**

Output at 4500=1

**CONCLUSION**

Thus the 8251 was initiated and the transmission and reception character was done successfully.

## EXPERIMENT NO.- 8

**OBJECTIVE:-** To interface Programmable Interval timer to 8085 and verify the operation of 8253 in six different modes

**APPARATUS REQUIRED: -**

Sr. no.	Name of equipments/components/software	Specification/range/rating/version	Quantity
1	8085 Microprocessor programming kit, instruction coding sheet.	SCIENTECH-8085	1
2.	Power supply	A.C (230V Mains)	
3.	CRO	20MHz	1

**DESCRIPTION/ALGORITHM:-**

**MODE 0- Interrupt On Terminal Count:**

At first let us see the channel in mode0. Connect the CLK0 to the debounce circuit and execute the following program.

**Program:**

```
MVI A, 30H
OUT CEH
MVI A, 05H
OUT C8H
MVI A, 00H
OUT C8H
HLT
```

**MODE 1- Programmable One Shot**

After loading the count, the output will remain low following the rising edge of the gate input. The output will go high on the terminal count. The program initializes channel 0 of 8253 in Mode 1 and also initializes triggering of gate.

**Program:**

```
MVI A, 32H
OUT CEH
MVI A, 05H
OUT C8H
MVI A, 00H
OUT C8H
OUT DOH
HLT
```

**MODE 3-Square Generation**

In this the output will remain high until one half of the count and goes low for the other half provided the count is an even number. This mode is used to generate the baud rate of 8251.

**Program:**

```
MVI A, 36H  
OUT CEH  
MVI A, 0AH  
OUT C8H  
MVI A, 00H  
OUT C8H  
HLT
```

**RESULT:**

Thus the 8253 PIT was interfaced to 8085 and the operations for mode 0, 1 and 3 were verified.

